NUCLEUS SATELLITE COMMUNICATIONS (MADRAS) PVT LTD

465,CITRUS DRIVE
MOPURU PALLI VILLAGE, SATHYAVEDU
Sri City,Tirupati
Andhra Pradesh-517541

Purchase Order

Supplier Code :
Supplier Name and Address:

CHINTALAPATI HOLDINGS PVT LTD

18, BLG3, ILABSCENTRE,
SOFTWAREUNITSLAYOUT,MADHAPUR,
Ranga Reddy, Telangana, 500081
Email:
GST: 36AABCC5085D1ZV

PO Number : **PO/25-26/0085**
PO Date : **17-02-2026**
Payment terms : **50% advance of PO Value along with (PO)**
:**45% on completion of Earthworks & Laying of GSB**
:**5% on completion of work**

Delivery time : Work completion45 days from PO receipt date
Mode of Transport: NA
Incoterms : NA


GST : **37AAACN9960D2ZA**

Please supply the following materials subject to terms and conditions. Kindly acknowledge receipt of this order

Sl.No	Item Code	Description	HSN/SAC code	Qty	UOM	Unit price (Rs)	GST%		Amount in (Rs)
							Rate	Amount	
		LAYING OF BT ROADS UPTO GSB							
		BILL OF QUANTITIES							
A1		Preparation and consolidation of sub grade with power road roller of 8 to 12 tonne capacity after excavating earth to an average of 30 cm depth,dressing to camber and consolidating with road roller including making good the undulations etc. and re-rolling the sub grade and disposal of surplus earth with lead upto 50 metres.	9954	1,950	Cum	354	18%	1,24,079	6,89,325
A2		Forming sub grade with embankment barrowed useful selected earth having MDD of not less than 1.75 Gms/CC from out side road boundary by mechanical means with all leads and lifts including prewatering of soil at barrow area, removal of top soil, excavation of soils at barrowed area, conveyance of soil, depositing the soils on the embankment, spreading soils, beaking clods, sectioning and consoilidation with vibratory road roller @ OMC to meet requirement of table 300-2 of MoRT&H, including all hire and operational charges of T&P and complete for finished item of work as per MoRT&H specification 305 (5th revision).	9954	1,176	Cum	253	18%	53,449	2,96,940
A3		Providing, Laying, Spreading and compacting 230mm graded GSB (GRANULAR SUB BASE) conforming to the MoRTH Specifications for Road and Bridge Works[23] as specified in IRC 37-2018 (4th Revision),including cost of all materials and including premixing the material with water at OMC in Mechanical mix plant carriage of mixed material by tipper to site , laying in uniform layers with paver in base courses on well prepared surface and compacting with Vibratory roller to acheive the desired density etc., as directed by the Engineer-in-Charge and as per MoRT&H specification 406 (5th revision) for finished item of work	9954	2047	Cum	909	18%	3,34,930	18,60,723

Total Amount Before Tax(Rs) :	28,46,988
GST Value :	5,12,458
Po Value (Rs) :	**33,59,446**

Total Amount in Words: **Thirty Three lakhs Fifty nine thousand and Four hundred and Forty six only**

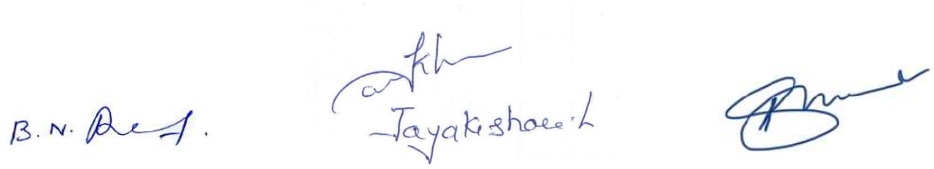

Prepared By | Verified By | Approved By

Terms and Conditions:

Start of work:
Once the supplier receipt of PO acceptance has to be made within 24 hrs and start of work to be carried out immediately (within 1-2 days)

Delivery & Execution:
Supplier has to complete the work on or before 45 days from receipt of PO. PO receipt must be acknowledged through electronic mail. Work should be carried out as per work schedule given by the supplier. Supplier exceeds the time line of completion may leads to LD clause as per Industry standards

Specification and changes:
No changes should be made against the scope if any necessity changes to be made during the execution should be discussed and agreed with customer without affecting the completing date and should the incorporate within the Po prices

Cancellation:
Once the supplier agreed and acknowledge the PO which cannot be cancelled during the execution time by the supplier at any cause. Acceptance criteria must includes consideration of all factors.


Inspection of product:
Brand/make of materials to be supplied and used for the scope of work should be Honer as per the PO. Deviations shall not be accepted and rejected by the customer moreover it should not make any loss of time interms of reprocurement and rework.

Warrenty:
Supplier should pass on the warranty of the raw materials and warranty of work. Warranty period of 5-7 years from the date of installation includes any damages, distortion and dismantling of any element due to the natural climatic conditions.

LD Clause:
The supplier agrees that the Late Delivery/Execution for the delayed work @2% of work order for every week and maximum of 8-10% upto 1 month shall be paid to Buyer

Billing to:
NUCLEUS SATELLITE COMMUNICATIONS (MADRAS) PVT LTD
465,CITRUS DRIVE
MOPURU PALLI VILLAGE, SATHYAVEDU
Sri City,Tirupati
Andhra Pradesh-517541

Shipping to:
NUCLEUS SATELLITE COMMUNICATIONS (MADRAS) PVT LTD
465,CITRUS DRIVE
MOPURU PALLI VILLAGE, SATHYAVEDU
Sri City,Tirupati
Andhra Pradesh-517541

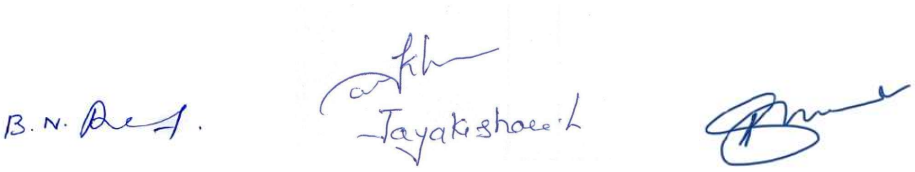

Prepared By | Verified By | Approved By